

Standard Features:

- 3/16" holes on 1/4" staggered centers
- Hinged removable extruded aluminum face frame with signature line marks
- Face set in an outer T-Bar filter grille frame
- Hand operated lever for easy filter access
- Square collar designed for 20" x 20" duct
- Holds up to a 2" filter (not included)
- Rust resistant pre-coat with durable powder finish
- Soft White

Options:

Preformed, contour molded fiberglass back with a foil barrier backing, accepts 6"-16" collar (collar by others). Holds up to 1" filter. (620F-PTFG)
 2" ADC compliant round collar with bead for ease of installation
 1 x 2 T-Bar (8" x 20" duct)
 2 x 4 T-Bar (20" x 44" duct)
 Holds up to a 4" filter (not included)
 NGD – Narrow ceiling grid dimples for 9/16" T-Rails, changes O.D. to 23 29/32"
 Premium 3" round collar with bead (620PTFG-3in)


Finishes:

STANDARD COLORS


- Soft White
- Driftwood Tan

DESIGNER COLORS


- Black
- Bronze
- Storm Gray
- Cement Gray
- Aluminum Paint
- Coffee Tan
- Warm White
- Glossy White

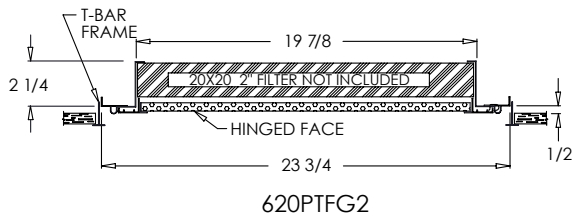


620PTFG2

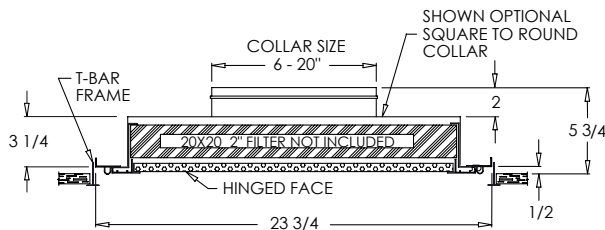


620PTFG2 with NLC

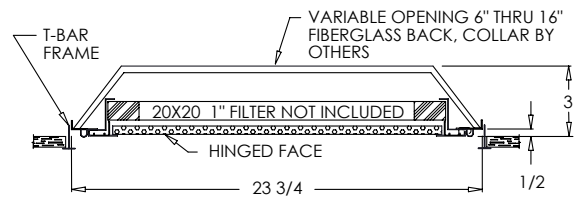

620F-PTFG (1" filter only)

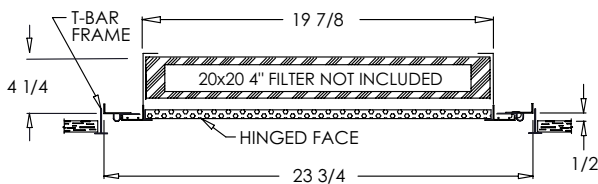

620PTFG4

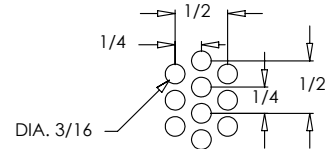

Perforated Screen Detail

Product Notes:

Filter grilles are manufactured 3/16" undersized nominal duct (outside dimension) for ease of installation. Air filter should be 1/4" to 1/2" undersize. Verify with air filter manufacturer for air specification to ensure a proper fit. Shoemaker filter grilles allow for installation of larger thickness filters (we offer 2" and 4" filter depths on specific models) which can reduce pressure drop on the overall system, improving air flow through the heat exchanger and allowing more time between filter changes. Contact customer service for more information.

Additional Information:

Submittal Notes

Project / Location:	
Engineer:	
Architect:	
Contractor:	