




LCF

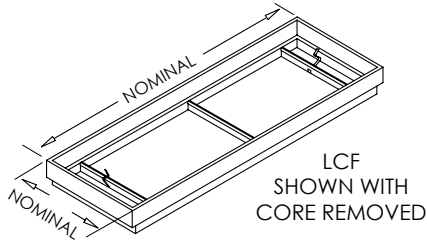


LCF  
 SHOWN WITH  
 CORE REMOVED







LCF 1/2 0°



LCF 1/2 20°



LCF 1/3 0°



**Note:**  
 Mounting hardware supplied by others. In high foot traffic applications recommended use of heavy gauge support brackets.

**Standard Features:**

- Extruded aluminum frame
- Precision aluminum construction for clean styling and efficient air distribution
- Core secured with stainless steel spring clips
- Available in lengths up to 144" in one piece (may vary for shipping and manufacturing considerations)
- Maximum available width is 14"
- 1/8" thick core blades run parallel to longest dimension
- 1/2" spacing with 0° or 20° deflection; actual spacing between bars is 3/8"
- 1/3" spacing with 0° deflection; actual spacing between bars is 1/4"
- Product manufactured to exact dimension given
- Satin Anodized

**Options:**

- Recessed screwdriver-operated opposed blade damper – 1/2" spacing
- Lever-operated opposed blade damper – 1/3" spacing
- Extruded aluminum adjustable curved blade air deflection grid
- Gym Grade construction with frame, and extra center margin supports
- Butt joints for continuous lengths
- Fractional dimensions
- Mounting brackets – see drawing (duct plates provided by others)

**Blade Spacing Options:**

- 1/2" - 0° Deflection      1/3" - 0° Deflection
- 1/2" - 20° Deflection

**Finishes:**

STANDARD COLORS

- Soft White
- Driftwood Tan
- Mill Finish
- Satin Anodized

DESIGNER COLORS

- Black
- Bronze
- Storm Gray
- Cement Gray

- Aluminum Paint
- Coffee Tan
- Warm White
- Glossy White

**Additional Information:**

**Submittal Notes**

Project / Location:	
Engineer:	
Architect:	
Contractor:	