


Standard Features:

- Extruded aluminum face frame with signature line marks set in an outer filter grille frame
- Precision aluminum construction for clean styling and efficient air distribution
- 1/8" thick core blades run parallel to longest dimension
- 1/2" spacing with 0° or 20° deflection; actual spacing between bars is 3/8"
- 1/3" spacing with 0° or 20° deflection; actual spacing between bars is 3/16"
- Hinged removable face with hinges parallel to longest side
- Hand operated lever for easy filter access
- 2-way reversible door on square and rectangular sizes
- Concealed mounting holes
- Sizes available up to 400 sq. in. (i.e. 20x20 or 24x14 or 30x12)
- Holds up to a 1" filter (not included) with filter retention tabs (LFG1)
- Soft White

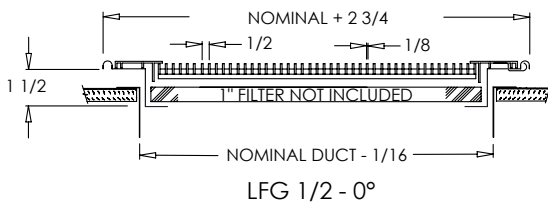

Options:

Gym grade construction with welded blades and frame, and extra center margin supports
 Alternative hinge and latch options available (please complete Filter Grille Order Supplement form)

Blade Spacing Options:

- | | |
|-----------------------|-----------------------|
| 1/2" - 0° Deflection | 1/3" - 0° Deflection |
| 1/2" - 20° Deflection | 1/3" - 20° Deflection |

Finishes:

STANDARD COLORS


- Soft White
- Driftwood Tan
- Mill Finish

DESIGNER COLORS


- Black
- Bronze
- Storm Gray
- Cement Gray

- Aluminum Paint
- Coffee Tan
- Warm White
- Glossy White


Blade Options:




LFG 1/2 - 0°



LFG 1/2 - 20°



LFG 1/3 - 0°



LFG 1/3 20°

Product Notes:

Filter grilles are manufactured 13/16" undersized nominal duct outside dimension for ease of installation. Air filter should be 1/4" to 1/2" undersized. Verify with air filter manufacturer for air specifications.

Additional Information:

Submittal Notes

Project / Location:	
Engineer:	
Architect:	
Contractor:	